



## ALVOLTA ULTRA 220W SLIM PORTABLE SOLARCASE

ALV-220SPC

### Key Features:



Up to 20.6% module efficiency



Weatherproof, IP65 sealed junction box



Low voltage-temperature coefficient



Sturdy, anodized aluminium frame



Pre-wired 900mm cable with MC4 connectors

### Suitable for:



**5** YEAR  
PANEL  
WARRANTY


# ALVOLTA ULTRA 220W SLIM PORTABLE SOLARCASE

## ALV-220SPC


### Electrical Data:

Maximum Power	220W
Optimum Operating Voltage	20.9V
Optimum Operating Current	10.53A
Open Circuit Voltage	24.5V
Short Circuit Current	11.05A
Module Efficiency	22.8%
Maximum System Voltage	200V DC
Power Tolerance	±3%

### Module Diagram:

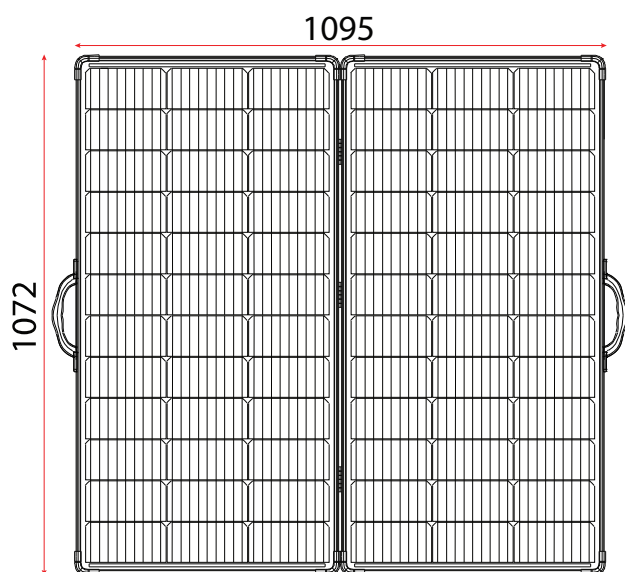

### IV-Curve:

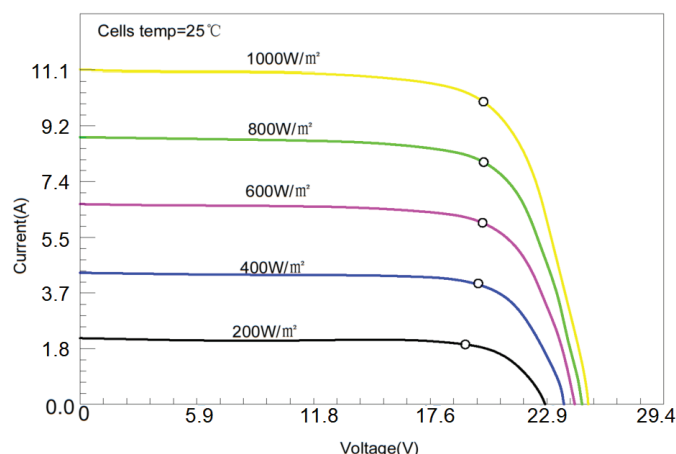

### Mechanical Data:

Solar Cells	Monocrystalline 166mm Cells
No. of Cells	72 (3 x 12 x 2)
Dimensions	1072 x 547 x 50mm (folded)
Dimensions	1095 x 1072 x 25mm (unfolded)
Weight	6.33kg
Frame	Anodized Aluminium
Junction Box	IP68 Rated
Connectors	MC4 Style
Output Cables	4mm², 900mm

### Thermal Data:

Operating Temperature Range	-20°C to +70°C
Temperature Coefficient (Pmax)	-0.38%/°C
Temperature Coefficient (Voc)	-0.36%/°C
Temperature Coefficient (Isc)	-0.05%/°C

2011/ 65/ EU and amending directive (EU)2015/863

EN IEC 62368-1:2020+A11:2020

\*All data and specifications provided in this datasheet are tested under standard test conditions, and may deviate marginally from actual values. Alvolta and its associates reserve the right to make modifications to the provided information without notice. Alvolta maintains the goal to supply customers with the most recent information regarding its products.



# ALVOLTA ULTRA 220W SLIM PORTABLE SOLARCASE

## ALV-220SPC

### Inclusions:

- Solarcase
- Heavy-Duty Carry Case for Solarcase
- 10m 6mm<sup>2</sup> Extension Lead
- Parallel Connection Lead with Anderson-Type Connectors
- Alligator Clips for Battery Connection
- Heavy-Duty Carry Case for Cabling Accessories

