




ALVOLTA 3 POSITION MINI BATTERY SWITCH

AS323003B

Key Features:



Multiple Circuits



300A Continuous
Current



IP66 Rated



M10 Terminal Studs



Durable Design

Suitable for:



1 YEAR
WARRANTY

ALVOLTA 3 POSITION MINI BATTERY SWITCH

AS323003B

Electrical Data:


Model	AS4323003B
Colour	Black
Switch Type	3-Position Selector
Battery Inputs	2
Switch Positions	3
Battery Combine	Not Available
Maximum System Voltage	32V DC
Continuous Current Rating	300A
Intermittent Current Rating (5m)	500A
Cranking Current Rating (30s)	900A
Terminal Stud Size	M10 (10mm)
Cable Size	120mm ² (4/0 AWG)
Cable Clearance	28.4mm (1.12")
Mounting Holes	M5 (5mm)
Terminal Stud Mounting Torque	13.56N-m (120 in-lb)
Terminal Stud Material	Tinned Copper
Housing Material	PVC
Ingress Protection	IP66
Dimensions	74.93 x 74.93 x 84.53mm
Weight	0.26 kg
Warranty	1 Year

*All data and specifications provided in this datasheet are tested under standard test conditions, and may deviate marginally from actual values. Alvolta and its associates reserve the right to make modifications to the provided information without notice. Alvolta maintains the goal to supply customers with the most recent information regarding its products.

ALVOLTA 3 POSITION MINI BATTERY SWITCH

AS323003B

Module Diagram:

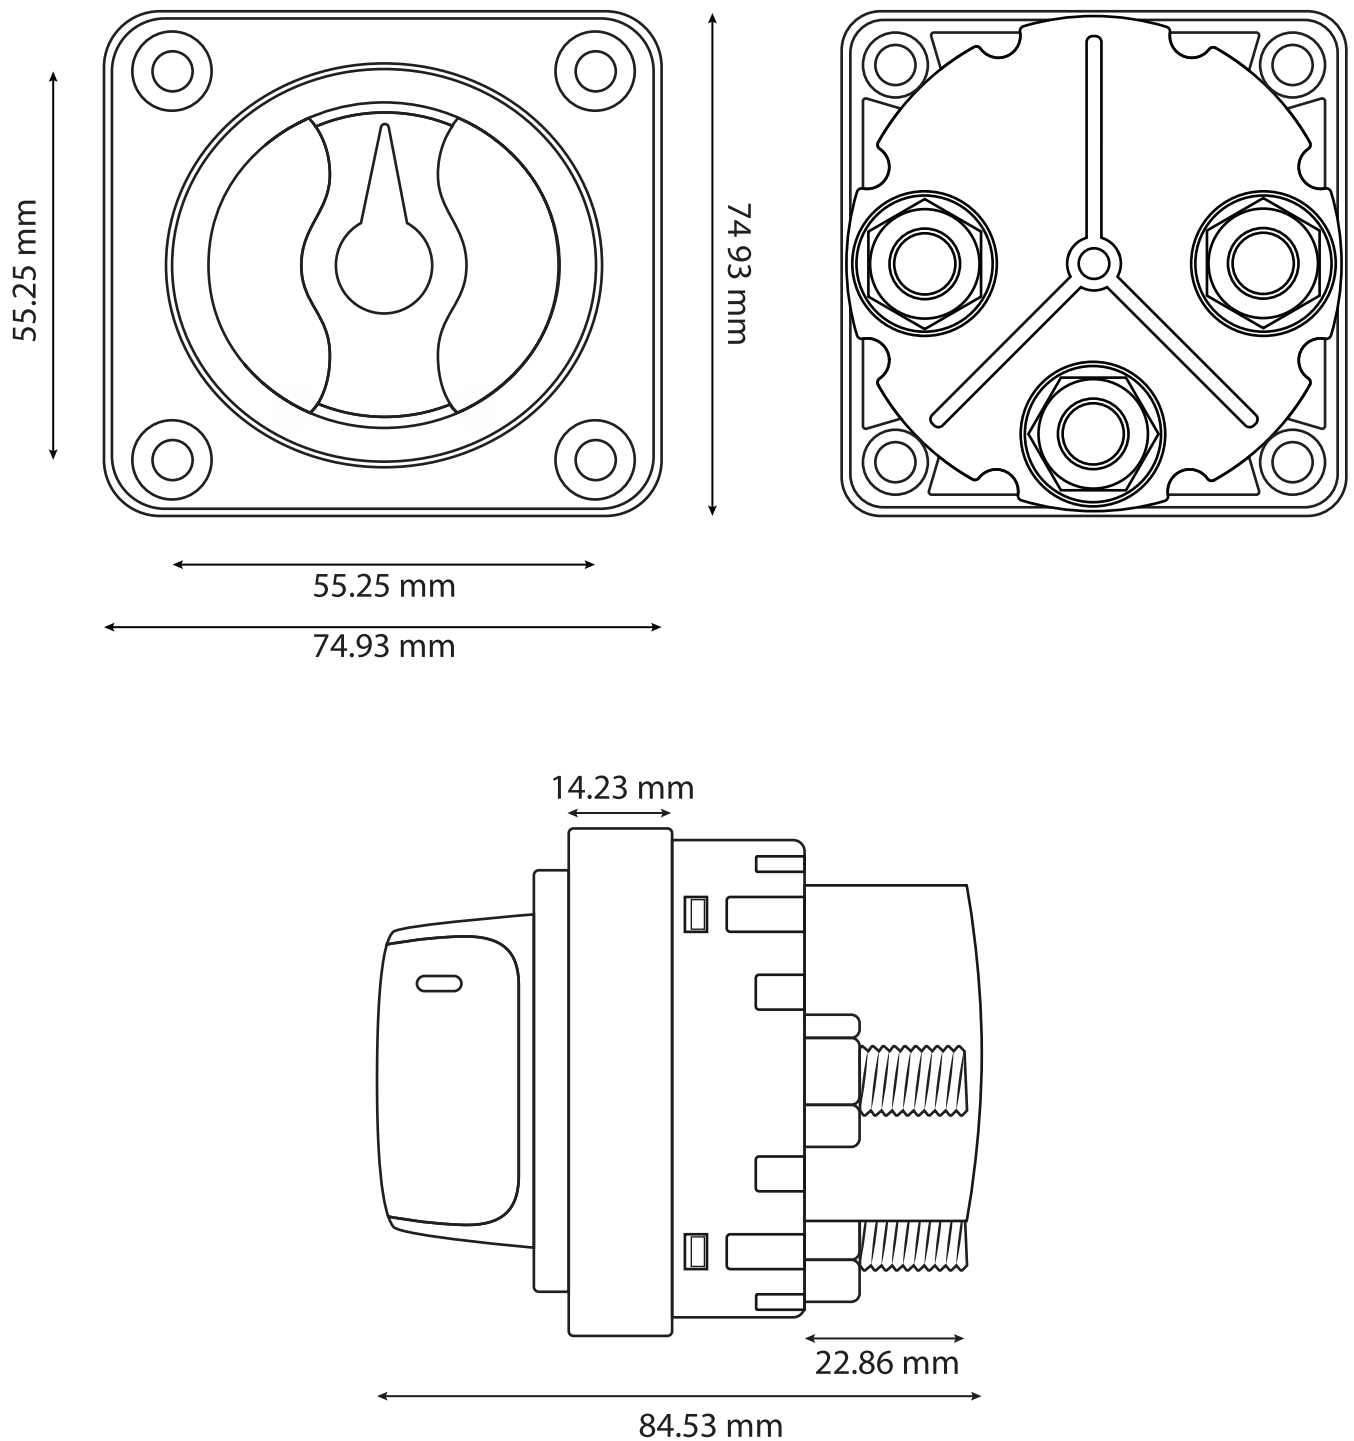

ALVOLTA 3 POSITION MINI BATTERY SWITCH

AS323003B

Switch Diagrams:

